


# product datasheet

## bugle head self-drill

## drywall screw

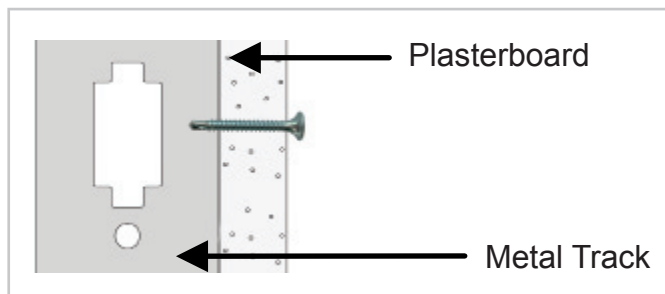

Evolution Fasteners (UK) Ltd  
 Unit 2A & 2B  
 Clyde Gateway Trade Park  
 Dalmarnock Road  
 Rutherglen  
 Glasgow  
 G73 1AE  
 Tel: +44 (0)141 647 7100  
 Fax: +44 (0)141 647 5100  
 technical@evolutionfasteners.co.uk

<b>Designed for:</b>	Fixing plasterboard to heavier gauge metal section (up to 2.5mm).
<b>Head Style:</b>	Bugle
<b>Drive Bit:</b>	Phillips 2
<b>Drill point:</b>	Self-drill point
<b>Thread Form:</b>	Twin
<b>Coating:</b>	Electroplated zinc
<b>Shank Material:</b>	Carbon steel
<b>Material Grade:</b>	AISI C1022
<b>Effective Thread Length:</b>	Fully threaded
<b>Recommended Drill Speed:</b>	2,000 - 3,000 RPM
<b>Steel Thickness:</b>	0.8mm - 2.5mm
<b>Drilling Capacity:</b>	0.8mm - 2.5mm

### Bugle Head Self-drill Drywall Range

Product Code	Size	Box Qty	Carton Qty	Fixture Thickness
DWSDZ25	3.5mm x 25mm	1,000	10,000	12mm
DWSDZ32	3.5mm x 32mm	1,000	10,000	15mm
DWSDZ35	3.5mm x 35mm	1,000	8,000	20mm
DWSDZ38	3.5mm x 38mm	1,000	10,000	20mm
DWSDZ42	3.5mm x 42mm	1,000	10,000	25mm
DWSDZ45	3.5mm x 45mm	1,000	6,000	25mm
DWSDZ50	3.5mm x 50mm	1,000	10,000	35mm
DWSDZ65	3.5mm x 65mm	500	5,000	50mm
DWSDZP75	3.5mm x 75mm	500	5,000	60mm
DWSDZ100	3.5mm x 100mm	500	3,000	85mm
DWSDZ125	3.5mm x 125mm	250	2,500	110mm

### Ultimate Mechanical Performance

Diameter	Tensile Strength	Shear Strength	Torque
3.5mm	1.4kN	0.8kN	2.7Nm

### Hardness Ratings (Vickers)

Diameter	Surface Hardness
3.5mm	600HV

Ask for Evolution



Drywall Screws



Tek Screws



Collated Screws



Masonry Screws



Anchors



Clips & Brackets