


product datasheet

bugle head self-drill

drywall screw

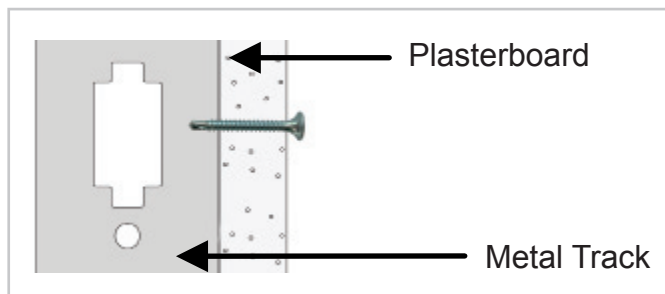

Evolution Fasteners (UK) Ltd
 Unit 2A & 2B
 Clyde Gateway Trade Park
 Dalmarnock Road
 Rutherglen
 Glasgow
 G73 1AE
 Tel: +44 (0)141 647 7100
 Fax: +44 (0)141 647 5100
 technical@evolutionfasteners.co.uk

Designed for:	Fixing plasterboard to heavier gauge metal section (up to 2.5mm).
Head Style:	Bugle
Drive Bit:	Phillips 2
Drill point:	Self-drill point
Thread Form:	Twin
Coating:	Electroplated zinc
Shank Material:	Carbon steel
Material Grade:	AISI C1022
Effective Thread Length:	Fully threaded
Recommended Drill Speed:	2,000 - 3,000 RPM
Steel Thickness:	0.8mm - 2.5mm
Drilling Capacity:	0.8mm - 2.5mm

Bugle Head Self-drill Drywall Range

Product Code	Size	Box Qty	Carton Qty	Fixture Thickness
DWSDZ25	3.5mm x 25mm	1,000	10,000	12mm
DWSDZ32	3.5mm x 32mm	1,000	10,000	15mm
DWSDZ35	3.5mm x 35mm	1,000	8,000	20mm
DWSDZ38	3.5mm x 38mm	1,000	10,000	20mm
DWSDZ42	3.5mm x 42mm	1,000	10,000	25mm
DWSDZ45	3.5mm x 45mm	1,000	6,000	25mm
DWSDZ50	3.5mm x 50mm	1,000	10,000	35mm
DWSDZ65	3.5mm x 65mm	500	5,000	50mm
DWSDZP75	3.5mm x 75mm	500	5,000	60mm
DWSDZ100	3.5mm x 100mm	500	3,000	85mm
DWSDZ125	3.5mm x 125mm	250	2,500	110mm

Ultimate Mechanical Performance

Diameter	Tensile Strength	Shear Strength	Torque
3.5mm	1.4kN	0.8kN	2.7Nm

Hardness Ratings (Vickers)

Diameter	Surface Hardness
3.5mm	600HV

Ask for Evolution



Drywall Screws



Tek Screws



Collated Screws



Masonry Screws



Anchors



Clips & Brackets